


Door Viewer Key Safe Installation Guide

Includes easy step by step setup, lists of contents and tools required

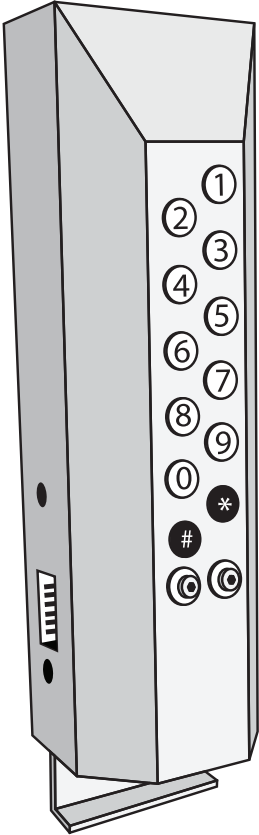


loxal
INTELLIGENT DIGITAL ACCESS

iDACS
Security Digital Access Products

Installation Guide

Door Viewer Key Safe

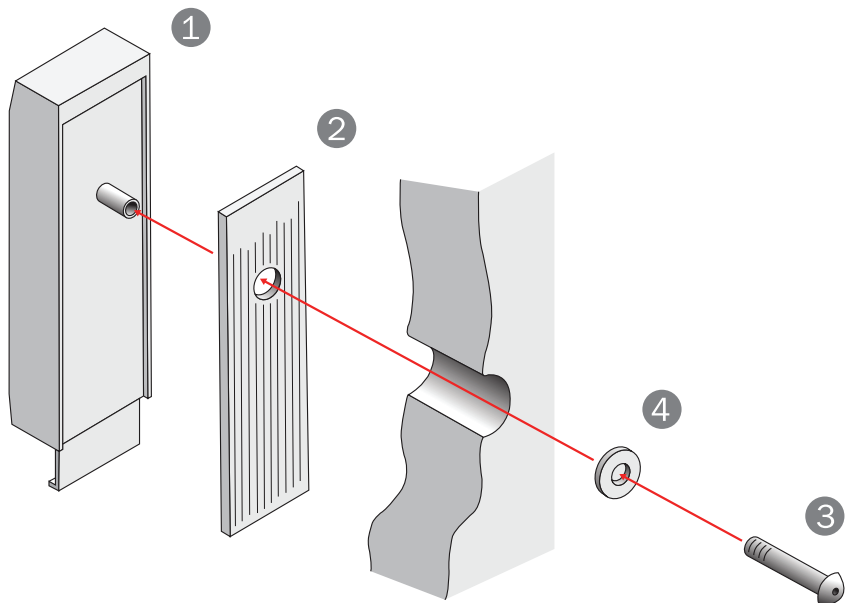

Contents included

- ① Door Viewer Key Safe
- ② Door Protector
- ③ Fixing Screw
- ④ Washer
- Cable Tie

Tools required

- Size 5 Hex Key
- Drill (if no door viewer present)
- 11mm Drill Bit (if no door viewer present)

User guide

1. Using the IDACS keypad enter your unique six digit code
2. Once the correct code has been entered you will hear a short sequence of beeps
3. Wait approximately 2 seconds before pulling down the drawer
4. Use keys then replace in drawer and close
5. When leaving the site repeat process

Important

If your key safe is integrated with an alarm system you must reset the alarm after locking the doors and replacing the key securely in the key safe. To reset alarm press the star (*) button then your 6 digit code followed by the hash (#) button.




1. Removed existing spy hole or drill an 11mm hole




2. Position the door protector



3. With door open, insert key safe

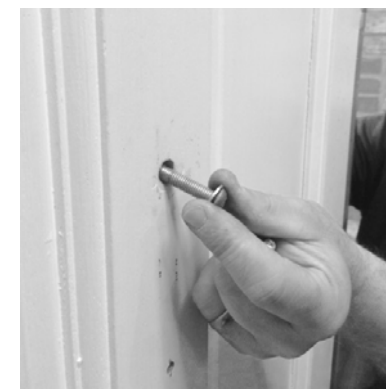

4. Holding key safe, locate fixing through the hole and tighten

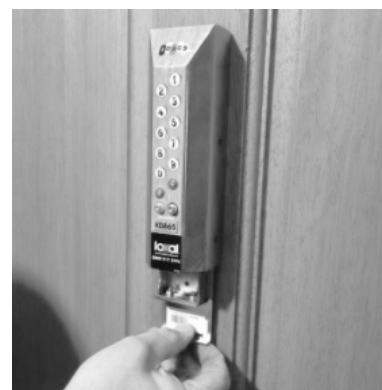


5. Enter IDACS code and pull down drawer




6. Use keys attached to the steel key retractor

Also available from Loxal




Face Fix Key Safe




Letterbox Key Safe



Integrated visual
verification wireless
alarm system



Digital Lock
Converter



Locking Bar



**For technical support please call
Loxal on 0800 9172994**

Loxal Security, Unit 5, Sevenoaks Business Centre
Cramptons Road, Sevenoaks, Kent TN14 5DQ

loxalsecurity.com